

# Technical features

## Digital clock

## Style 12

### Description :

- ▶ Led clock for indoor or outdoor installation.
- ▶ Hour - minute display.
- ▶ Fixed time, fixed temperature or alternate time and temperature display.
- ▶ Height of digit 12 cm, readability 50 metres.
- ▶ Diode colours : red, yellow.
- ▶ Models : independent / 24V minute impulse receiver, IRIG-B/AFNOR coded time receiver, wireless DHF receiver or radio synchronised (FI or DCF signal).



### Technical features :

- ▶ Injected ABS case black with diffusing filter for outdoor model.
- ▶ Adjustable brightness on 4 levels for indoor model and by automatic photo cell on outdoor model.
- ▶ Angle of vision 120°.
- ▶ Protection index IP51 for indoor model and IP53 for outdoor model.
- ▶ 24 hour display mode.
- ▶ Data saving for 3 days.
- ▶ Accuracy of the time quartz base : 0,2 second/day.
- ▶ Silent operation.
- ▶ Programming and time setting through 2 buttons.
- ▶ Digit made of 7 segments with 9 Led each.
- ▶ Power supply 230V ±10%, 50/60 Hz.
- ▶ Consumption : 54 mA.
- ▶ Operating temperature : from 0 to 50°C for indoor model and from -40 to 70°C for outdoor model.
- ▶ Weight : 5 Kg.

### Norms :

- ▶ Norm NF EN50081-1 : generic emission standard.
- ▶ Norm NF EN50082-1 : generic immunity standard.
- ▶ Norm NF EN60950 : safety of information technology equipment.
- ▶ Norm NF EN300-220-3: radio equipment standard.
- ▶ Norm NF EN301-489-3: EMC standard for radio equipment.


### Mounting Accessories :

- ▶ Single or double sided bracket 935 001
- ▶ Double sided chain bracket 935 002
- ▶ Desktop support 935 003
- ▶ Temperature probe with 5 metres cable 935 011
- ▶ Wiring kit for double sided 935 012

### Led colours



### Dimensions in mm

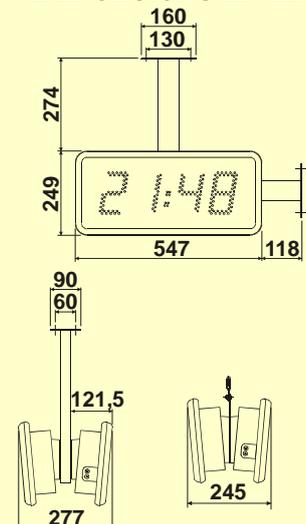

### Style 12 references

|                                    | Indoor  | Outdoor |
|------------------------------------|---------|---------|
| ▶ Independent / impulse receiver   | 935 111 | 935 311 |
| ▶ IRIG-B/AFNOR coded time receiver | 935 121 | 935 321 |
| ▶ Radio synchronised FI signal     | 935 151 | 935 351 |
| ▶ Radio synchronised DCF signal    | 935 161 | 935 361 |
| ▶ Wireless DHF receiver            | 935 171 | 935 371 |

Indicate Led colour by choosing the last number of the reference : red (1), yellow (3).

